


配光曲線図


光度 cd/1000lm

— A-A
— B-B
— C-C

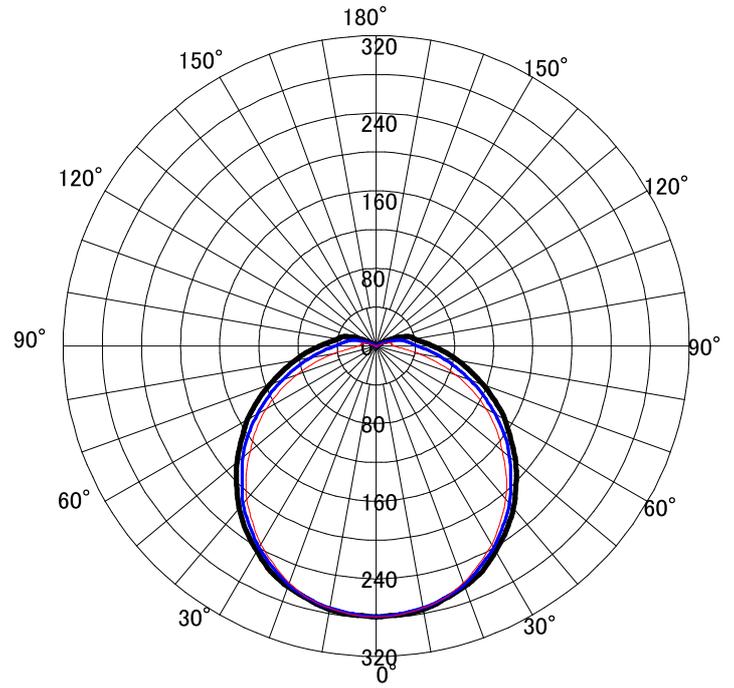

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	0	0	0
-170°	0	0	0
-160°	0	0	0
-150°	0	0	0
-140°	0	0	0
-130°	0	0	0
-120°	6	0	0
-110°	27	0	13
-100°	40	15	30
-90°	58	18	42
-80°	84	43	68
-70°	116	86	102
-60°	152	130	140
-50°	186	168	178
-40°	218	206	212
-30°	244	236	240
-20°	264	260	262
-10°	276	274	274
0°	279	279	279

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	279	279	279
10°	276	274	274
20°	264	260	262
30°	244	236	240
40°	218	206	212
50°	186	168	178
60°	152	130	140
70°	116	86	102
80°	84	43	68
90°	58	18	42
100°	40	15	30
110°	27	0	13
120°	6	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

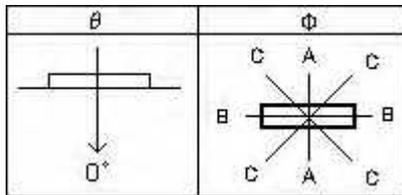

器具効率	最大取付間隔		保守率		
	UP 6.9 % 100.0 % DN 93.0 %	A-A 1.30 H	良	中	否
	B-B 1.25 H	83	81	77	

反射率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30		10		30		10		30		10		30		10		30		10		0			
室指数		照明率 U (× 0.01)																							
0.6	44	35	28	42	34	28	43	34	28	41	33	28	41	33	28	39	32	27	32	27	32	27	24		
0.8	55	45	38	51	43	37	53	44	38	50	43	37	51	43	37	48	41	36	41	36	41	36	33		
1.0	64	54	46	59	51	45	62	52	46	58	50	44	58	50	44	55	49	43	48	43	49	43	39		
1.25	72	62	55	66	58	52	70	61	54	65	57	52	66	58	52	62	56	50	55	50	56	50	46		
1.5	78	69	61	71	64	58	76	67	60	70	63	57	71	64	58	67	61	56	61	56	61	56	51		
2.0	88	79	72	79	72	67	85	77	70	77	71	66	79	73	67	74	69	64	69	64	69	64	59		
2.5	95	87	80	84	78	73	91	84	78	82	77	72	85	79	74	79	74	70	75	70	74	70	64		
3.0	100	93	86	88	83	78	96	90	84	86	81	77	90	84	80	82	78	75	79	76	78	75	69		
4.0	107	101	95	92	88	85	103	97	93	91	87	84	95	91	87	87	84	81	85	82	84	81	75		
5.0	111	106	101	95	92	89	107	102	98	94	90	88	99	95	92	90	87	85	89	86	87	85	78		